



**DEXTER**  
LAUNDRY

DEXTER LAUNDRY

# VENDED LAUNDRY CATALOG



**DEXTER.COM**





## BUILDING BETTER LIVES TOGETHER

Investing in laundry equipment is an investment in your future. Whether you're looking for a good investment or looking to expand your business we can help you achieve your dreams. As an employee-owned company our success depends on your success. Our team is passionate about the laundry industry and helping customers just like you build successful businesses. We want to enable you to live the life you want to, not the life you have to.

For over a century, Dexter Laundry has been helping people and companies around the world process laundry faster and more efficiently. Our complete line of washers, dryers and management systems provide the perfect combination to help you achieve great success. However, our relationship doesn't end once the initial sale is complete. We stand behind every machine we build because we are passionate about creating the best laundry ownership experience we can.

Our commitment doesn't stop there, Dexter annually reinvests millions of dollars into improving the laundry experience. Clean laundry is a basic human need that is felt all over the world. The positive impact of our products continues to spread globally, with new countries and regions being served every day. We are proud to partner with our Dexter Authorized Distributors and with laundry owners and managers worldwide to provide for this basic need.

At Dexter Laundry, we believe we are building more than just washers and dryers...we believe we are **BUILDING BETTER LIVES TOGETHER**. We hope you will join us.

## THE DEXTER ADVANTAGE



As employee-owners, our long-term success depends on your long-term success. Our focus in every product we build and every service we provide is to make laundry owners and users successful and satisfied. We do this by designing products that can live-up to our own expectations of high quality so that we can confidently stand behind your investment. Our company, our products and our promise comprise the **DEXTER ADVANTAGE** - the edge you need to help you win the race against your competition.



## OUR COMPANY

Dexter Laundry has been helping people and customers around the world process laundry faster and more efficiently for almost 125 years. All of our products are designed, built, and assembled in the USA at our headquarters in Fairfield, Iowa.

As an employee-owned company our personal success depends on yours and we're committed to building better lives together.

## OUR PRODUCTS

Every Dexter product is designed and built to ensure that it will withstand even the harshest laundry environments. We refuse to compromise on the engineering or quality of materials that we put into every machine.

To provide the highest quality and reliability, we believe that every Dexter-branded product should be made by us.



## OUR PROMISE

Here at Dexter we're committed to helping our customers achieve long-term success. You're welcome to contact our team before, during, and after your laundry investment. We're here to help and happy to guide you along the way.

As further proof of this commitment, every Dexter product comes with an industry-leading warranty and lifetime technical support.



# OUR COMPANY

A CHAMPIONSHIP LINE SINCE 1894

Dexter Laundry has been helping people and companies process laundry faster and more efficiently since 1894. Over the past 120 years, our journey has seen wooden hand-powered wringer washers give way to high-performance, large capacity machines capable of processing large loads of laundry in under an hour.

Dexter equipment has always been exclusively produced in the heart of America. Our journey began in Dexter, Iowa, with the production of hand-powered washers constructed with wooden slats and held together with metal bands. Demand for Dexter products grew quickly, and in 1912 the company moved to Fairfield Iowa, where it remains today. Throughout the following decades our products evolved many times eventually becoming the commercial laundry equipment of today.



Today all of our products are engineered, manufactured, and tested thoroughly to ensure that they will show up for work in even the harshest laundry environments. Each machine is carefully built and assembled in our state of the art facility by craftsmen with a total of almost 2,000 years of experience. We believe that every Dexter-branded product should be made by us, and we refuse to compromise on the engineering or quality of the materials that we put into every machine.

## THE DEXTER THOROUGHBRED NAMESAKE

Throughout history, our company has stayed true to its namesake - Dexter, a championship thoroughbred horse known for speed and power. Used as a model for weather vanes and as the subject of a famous Currier & Ives painting featuring President Grant, Dexter the horse was the perfect symbol of American drive and quality.



Our logo keeps the Dexter icon to symbolize our dedication to high performance, unmatched strength, unrivaled endurance and loyalty to our Dexter customers. We work hard every day to produce equipment with a beautiful appearance, energetic stance and a workhorse attitude. Our goal is not only to run the race, but also help our customers beat their competition.



THE CHAMPIONED HORSE DEXTER, "THE KING OF THE TOWN"



THE  
DEXTER FAMILY

The Dexter family spans the globe and is filled with amazing people who are building better lives for themselves and their communities. We can't wait to add your story!



“Not only are Dexters dependable, they are efficient, attractive, and my customers gravitate towards them. They are the real deal. A coin laundry without Dexters is just a room full of washers.” - Shears Laundry



“I love that Dexter is Made in America and owned by the employees. That is hard to find anymore. Thank you. Keep up the good work!”  
- Express Laundry, East Aurora, NY



“Our Dexter machines are performing wonderfully. Our customers are particularly happy with the predictable wash times and the safety stop feature.”  
- Matt Hurley, D's Wash and Dry

“The quality of the machines is what sold me. They just work.”  
- Debbie Dower, Paradise Laundry

“I've been able to succeed due to Dexter's durable and cost-effective equipment.”  
- Mr. Akagi, Aeon Town



“We did our research and came to the conclusion that Dexter is the industry leader. My distributor showed me the equipment and its proven design of frames and major components, all made in the USA. We were sold.”  
- Gary Miller, Wash n Fold Express



“I would highly recommend Dexter products to anybody getting into the business.”  
- Key Ramsey, Keyway SuperSudz



“In the end it was the little things that made a huge difference.”  
- Rita Ferrero, Sierra Laundry




“There's no component of our success that hasn't been influenced by Dexter in some way. It's been second to none. I love the Dexter product. It's reliable. It's durable. It's amazing.” - Dan Campbell, Wash Around the Clock



“Customers love them. We are a committed, happy, Dexter customer. Dexter is an excellent company...the support has been overwhelming. We've been using Dexter equipment since 1996. It's a testament to the quality equipment that we're still with them...I enjoy the good life that I have because of the products from Dexter.” - Dioniso D'Aguilar, Superwash Limited



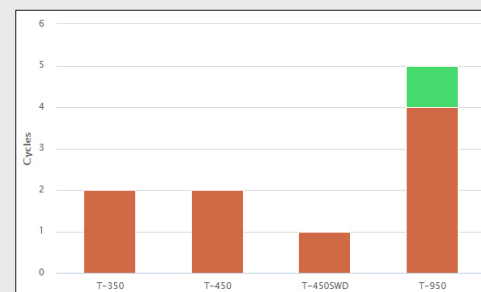

**Free Start**  
Press "Free Start" with machine in idle status to satisfy vend price one time.

**Reboot Control**  
Press "Reboot Control" to cycle power off and back on to reboot machine control.

**Remove from Service**  
Press "Remove from Service" to remove machine pocket from service.

## THE DEXTER DIFFERENCE



When laundry is your business, every cycle counts. At Dexter, we pride ourselves on producing products that will offer you a competitive advantage while lasting for years. We offer durable and reliable equipment, powerful controls to make managing your business easier, competitive financing, and lifetime technical support. That's the **DEXTER DIFFERENCE**. We're here to help you increase your profits with a better built machine and give you the tools you need to protect and manage your investment.

### STATE OF THE ART REPORTING

Real-time reporting, anytime, anywhere. Track business performance, including revenue, cycle selection, revenue since last collection, machine usage, and revenue by PLUS cycle.

### EMAIL ALERTS

Keep up-to-date on the status of your laundry with regular notification emails. You can choose to receive emails daily, hourly, or as error codes occur.

### REMOTE ACCESS

DexterLive offers the ability to remotely vend a machine, reset a control, or take a machine out of service. This enables you to quickly react to customer needs, without having to go to your store.

### MAXIMIZE REVENUE

Easily create customized pricing and promotions. With multiple PLUS cycles and promotional pricing options available, you can choose the perfect offering to fit your business needs.

### EASY TO PROGRAM

Program your machines faster and easier with DexterLive, without needing any proprietary software or devices. With a networked store, these changes will be automatically updated on your machine. Without a network, you can use the easily accessible USB ports to transfer your programs.

### PLAN COLLECTION TIMES

With DexterLive you can easily track the revenue generated since your last collection. This will help you predict when your coin boxes will be full so you can plan collection times accordingly.

### LOW, OR NO, COST OF OWNERSHIP

Every Dexter C-Series washer and dryer comes with free access to DexterLive.com, for programming and setting machine promotions. For more features, networking a store is relatively inexpensive. The initial set-up costs just pennies per day per machine.

### INCREASE PROFITS

Laundry is a big investment. Dexter products will help you maximize the return on your investment with easy to program PLUS cycles and machines that look great for years to keep customers coming back. They will also help lower utility costs with electronic pressure sensors, energy efficient motors, and our Express line of 200 g-force machines which extract more water to save on dry time.



### BETTER INGREDIENTS & BETTER DESIGN

Durability matters, that's why we select only the highest quality materials, such as 304-stainless steel and dual Forsheda bearing seals, for a product that not only looks great, but can withstand even the harshest laundry environments. Every new washer model is designed to withstand our extreme 1,000 hour out-of-balance test.



### PEACE OF MIND

Whether you're an experienced owner or new to the industry, we can give you peace of mind in your investment in many areas of your business. You can receive expert financing help with our partners at Dexter Financial Services. Our washers offer many user-friendly features, including an emergency stop button and front-soap dispensers for simple and safe use. Finally, we stand with you for the life of the product with lifetime technical support and industry-leading warranties.





THE  
DEXTER DIFFERENCE



WASHER PRODUCT DETAILS

INCREASE PROFITS

MAXIMIZE REVENUE

Our upgraded controls are simple to program with a variety of PLUS cycles and promotions. With a dry-to-dry time of one hour, the Dexter Express line gets your customers in and out quickly.

HAPPY CUSTOMERS

Dexter washers feature a polished chrome door and AISI 304 stainless steel tub, cylinder, top, front and side panels which keep your washers looking like new year after year.

REDUCE UTILITIES

All washers have an adjustable electronic pressure sensor, which can reduce your water usage significantly and rugged inverter drives which lower electrical costs. Our Express line of 200 g-force machines spin faster to reduce dry times.

BETTER INGREDIENTS & BETTER DESIGN

BETTER INGREDIENTS

Here at Dexter we select only the best materials, choosing quality over cost. This includes our heavy-duty Japanese bearings in a cast iron bearing housing, protected by dual Forsheda seals.

RUGGED DESIGN

Our heavy-duty frame design has been proven for over two decades. Every new washer model is designed to withstand our 1,000 hour test, running at maximum extract with an extreme out-of-balance load.

FLEXIBLE INSTALLATION

Dexter washers can be installed on single or three-phase power. They also offer variable extract speeds as well as slow drain and slow fill options to accommodate a variety of installations. Most washers fit through a standard 36" doorway.

PEACE OF MIND

PROTECT YOUR INVESTMENT

Every Dexter washer comes with an emergency stop button. This feature enables your customers to add or remove items when needed without damaging your machine.

EASY ON YOUR CUSTOMERS

Our larger capacity washers include an easy access front soap dispenser. The simple controls are user friendly and easy to understand with multiple language options and detailed customer prompts.

WARRANTY PROTECTION

Every washer is backed by our industry-leading 10-year warranty on the frame, tub, cylinder, shaft, seals, bearings, and bearing housing. Everything else is covered by a 3-year parts warranty.

DRYER PRODUCT DETAILS

INCREASE PROFITS

MAXIMIZE SPACE

Dexter stack dryers give you the power of two dryers in a single space, doubling your revenue potential. Vertical exhaust and venting come standard on every dryer, making it even easier to upgrade to stack dryers.

FAST DRY TIMES

Our line of Express dryers offers the right combination of air flow and BTUs that, when combined with our 200 g-force washers, offer fast dry times for more customer turnover.

REDUCE UTILITIES

Energy efficient motors reduce electrical usage to save hundreds of dollars over the life of the dryer. The reduced motor amperage also allows for lower installation costs.

BETTER INGREDIENTS & BETTER DESIGN

BETTER INGREDIENTS

Dexter dryers are designed with heavy-duty bearings in a cast bearing housing, and fully welded and painted cabinets. They are available with chrome doors and stainless steel tumblers to keep dryers looking great for years.

BETTER AIR FLOW

Perforated tumblers, balanced airflow, and the right amount of air recirculation provide fast dry times and maximum efficiency. This helps to increase customer throughput and save on utility expenses.

NO FRONT SUPPORTS

Our heavy-duty welded steel spider and bearing assemblies support the tumbler from the rear and eliminate the need for front support rollers, a common wear part.

PEACE OF MIND

PROTECT YOUR INVESTMENT

All dryers are available with screw-resistant tumblers to reduce tumbler damage.

EASY TO MAINTAIN

With a single location for gas, electrical, and venting connections, Dexter stack dryers are easy to install and maintain.

WARRANTY PROTECTION

Every dryer is backed by our industry-leading 5-year warranty on the trunnion, bearings, and bearing housing. Everything else is covered by a 3-year parts warranty.



**WASHERS** Built to Last | Energy Efficient | 10-Year Warranty



**T-300**  
20 lb (9.1 kg)



**T-400**  
30 lb (13.6 kg)



**T-600**  
40 lb (18.1 kg)



**T-900**  
60 lb (27.2 kg)



**T-1200**  
80 lb (36.3 kg)

**EXPRESS WASHERS** Built to Last | High Extract | Energy Efficient | 10-Year Warranty



**T-350**  
20 lb (9.1 kg)



**T-450**  
30 lb (13.6 kg)



**T-650**  
40 lb (18.1 kg)



**T-750**  
50 lb (22.7 kg)



**T-950**  
60 lb (27.2 kg)



**T-1450**  
90 lb (40.8 kg)

**EXPRESS DRYERS** Built to Last | Superior Performance | 5-Year Warranty



**T-20x2 STACK**  
2 x 20 lb (2 x 9.1 kg)



**T-30x2 STACK**  
2 x 30 lb (2 x 13.6 kg)



**T-50x2 STACK**  
2 x 50 lb (2 x 22.7 kg)  
Reversing Option



**T-30 SINGLE POCKET**  
30 lb (13.6 kg)



**T-50 SINGLE POCKET**  
50 lb (22.7 kg)



**T-80 SINGLE POCKET**  
80 lb (36.3 kg)

All vented products available with blue or black graphics.  
For more information on product features and specifications visit us at **DEXTER.COM**

**EXPRESS STACK WASHER-DRYERS**



**T-350 STACK WASHER-DRYER**  
WASHER: 20 lb (9.1 kg)  
DRYER: 20 lb (9.1 kg)



**T-450 STACK WASHER-DRYER**  
WASHER: 30 lb (13.6 kg)  
DRYER: 30 lb (13.6 kg)



**T-750 STACK WASHER-DRYER**  
WASHER: 50 lb (22.7 kg)  
DRYER: 50 lb (22.7 kg)  
Reversing



STANDARD WASHER SPECIFICATIONS

			T-300		T-400		T-600		T-900		T-1200	
Capacity	Dry Weight Capacity - lb (kg)		20	(9.1)	30	(13.6)	40	(18.1)	60	(27.2)	80	(36.3)
	Cylinder Volume - cu ft (L)		2.7	(76.5 )	4	(113.3 )	6	(170)	9	(254.9)	11.5	(325.6)
Speed	High Extract Speed - g (RPM)		100	(579)	100	(532)	100	(532)	100	(485)	100	(485)
	Intermediate Extract Speed - g (RPM)		60	(449)	60	(412)	60	(412)	60	(375)	60	(375)
	Washing Speed - g (RPM)		0.9	(55)	0.9	(50)	0.9	(50)	0.9	(43)	0.9	(43)
	Motor Size - hp (kW)		1	(0.75)	2	(1.5)	2	(1.5)	3	(2.2)	3	(2.2)
Dimensions	Cabinet Height - in (cm)		43 7/8	(111.4)	48 3/16	(122.4)	49 11/16	(126.2)	55 3/8	(140.7)	57 7/8	(147)
	Cabinet Width - in (cm)		26	(66)	29 7/8	(75.9)	29 7/8	(75.9)	34 3/8	(87.3)	34 3/8	(87.3)
	Cabinet Depth - in (cm)		25	(63.5 )	27 3/8	(69.5)	36	(91.4)	38 7/8	(98.8)	45 3/8	(115.3)
	Door Opening - in (cm)		12 1/4	(31.1)	15 1/4	(38.7)	15 1/4	(38.7)	19 1/4	(48.9)	19 1/4	(48.9)
	Floor to Door Bottom - in (cm)		14 7/8	(37.8)	16 1/4	(41.3)	16 1/4	(41.3)	16	(40.6)	18 1/2	(47)
	Cylinder Diameter - in (cm)		21	(53.3)	25	(63.5)	25	(63.5)	30	(76.2)	30	(76.2)
	Cylinder Depth - in (cm)		13 1/2	(34.3)	14 1/8	(35.9)	21 1/8	(53.7)	22	(55.9)	28	(71.1)
Weight	Net Weight - lbs (kg)		317	(143.8)	432	(196)	558	(253.1)	964	(437.3)	1022	(463.6)
Shipping	Shipping Weight - lbs (kg)		340	(154.2)	450	(204.1)	580	(263.1)	980	(444.5)	1063	(482.2)
	Shipping Height - in (cm)		50	(127)	53 1/4	(135.3)	54 3/4	(139.1)	61 1/2	(156.2)	63 3/4	(161.9)
	Shipping Width - in (cm)		27 1/4	(69.2)	31 1/2	(80)	31 1/2	(80)	36	(91.4)	36	(91.4)
	Shipping Depth - in (cm)		30 1/2	(77.5)	33 1/2	(85.1)	41	(104.1)	44 1/4	(112.4)	52 3/16	(132.6)
Water	Water Inlet Size - in (mm)		3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)
	Pressure (min/max) - psi (kPa)		30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)
	Flow Rate Per Valve - gal/min (L/min)		9	(34)	9	(34)	9	(34)	9	(34)	9 & 12	(34 & 45)
	Approx. Water Usage (per cycle) - gal (L)		15.8	(59.8)	23.5	(89)	35.1	(132.9)	52.6	(199.1)	67	(253.6)
	Drain Diameter (O.D.) - in (cm)		2 1/4	(5.7)	3	(7.6)	3	(7.6)	3	(7.6)	3	(7.6)
	Floor to Center of Drain - in (cm)		6	(15.2)	4 11/16	(11.9)	5	(12.7)	6 5/8	(16.8)	8 5/8	(21.8)
Electrical	Model	Volts / Hz / Phase / Wiring	Circuit Breaker / Running Amps / Wire Size									
	-10	120 / 60 / 1 / Provided	20 / 13 / Provided	---	---	---	---					
	-12	208-240 / 60 / 1 / 2 wire + ground	15 / 4 / #12	15 / 6.2 / #12	15 / 6.2 / #12	20 / 8.4 / #12	20 / 8.4 / #12					
		208-240 / 60 / 3 / 3 wire + ground										
	-39	230 / 50 / 1 / 2 wire + ground	15 / 4 / 3.5 mm²	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	20 / 8.4 / 3.5 mm²	20 / 8.4 / 3.5 mm²					
	-59	230 / 50 / 1 / 2 wire + ground	15 / 4 / 3.5 mm²	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	20 / 8.4 / 3.5 mm²	---					
Installation	Min. Clearance Between Machines - in (cm)		1/2	(1.3)	1/2	(1.3)	1/2	(1.3)	1/2	(1.3)	1/2	(1.3)
	Min. Clearance Behind Machines - in (cm)		24	(61)	24	(61)	24	(61)	24	(61)	24	(61)
	Min. Concrete Thickness - in (cm)		6	(15.2)	6	(15.2)	6	(15.2)	8	(20.3)	8	(20.3)

Due to continuous product improvements specifications are subject to change, please consult Dexter Laundry, your Dexter Authorized Distributor or the installation manual for the most accurate information. Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE and AGA.

EXPRESS WASHER SPECIFICATIONS

			T-350		T-450		T-650		T-750		T-950		T-1450	
Capacity	Dry Weight Capacity - lb (kg)		20	(9.1)	30	(13.6)	40	(18.1)	50	(22.7)	60	(27.2)	90	(40.8)
	Cylinder Volume - cu ft (L)		2.7	(76.5)	3.8	(107.6)	6	(170)	6.5	(184.1)	9	(254.9)	13.7	(388)
Speed	High Extract Speed - g (RPM)		200	(819)	200	(750)	200	(750)	200	(685)	200	(685)	200	(617)
	Intermediate Extract Speed - g (RPM)		60	(449)	60	(411)	60	(411)	60	(375)	60	(375)	60	(338)
	Washing Speed - g (RPM)		0.9	(55)	0.9	(50)	0.9	(50)	0.9	(43)	0.9	(43)	0.9	(39)
	Motor Size - hp (kW)		1	(0.75)	2	(1.5 )	2	(1.5)	3	(2.2)	3	(2.2)	6.7	(5)
Dimensions	Cabinet Height - in (cm)		43 7/8	(111.4)	48 3/16	(122.4)	53	(134.6)	53 7/8	(136.9)	55 3/8	(140.7)	62 3/8	(158.4)
	Cabinet Width - in (cm)		26	(66)	29 7/8	(75.9)	29 7/8	(75.9)	34 3/8	(87.3)	34 3/8	(87.3)	41 1/2	(105.4)
	Cabinet Depth - in (cm)		28	(71.1)	28 1/4	(71.8)	38 1/8	(96.8)	32 7/8	(83.5)	38 7/8	(98.7)	42 1/4	(107.3)
	Door Opening - in (cm)		12 1/4	(31.1)	15 1/4	(38.7)	15 1/4	(38.7)	19 1/4	(48.9)	19 1/4	(48.9)	19 1/4	(48.9)
	Floor to Door Bottom - in (cm)		14 7/8	(37.8)	16 1/4	(41.3)	16 1/4	(41.3)	16	(40.6)	16	(40.6)	19 5/16	(49.1)
	Cylinder Diameter - in (cm)		21	(53.3)	25	(63.5)	25	(63.5)	30	(76.2)	30	(76.2)	37	(94)
	Cylinder Depth - in (cm)		13 1/2	(34.3)	13 3/8	(34)	21 1/8	(53.7)	16	(40.6)	22	(55.9)	22	(55.9)
Weight	Net Weight - lbs (kg)		383	(173.7)	526	(238.6)	744	(337.5)	920	(417.3)	1000	(453.6)	1322	(599.6)
Shipping	Shipping Weight - lbs (kg)		407	(184.6)	544	(246.8)	766	(347.5)	947	(429.6)	1016	(460.8)	1364	(618.7)
	Shipping Height - in (cm)		49 1/4	(125.1)	53 1/4	(135.3)	58 3/4	(149.2)	60	(152.4)	61 1/2	(156.2)	69 1/4	(175.9)
	Shipping Width - in (cm)		28 1/4	(71.8)	31 1/2	(80)	31 1/2	(80)	36	(91.4)	36	(91.4)	43 1/8	(109.5)
	Shipping Depth - in (cm)		33 1/2	(85.1)	33 1/2	(85.1)	43 3/4	(111.1)	38	(96.5)	45 1/4	(114.9)	48	(121.9)
Water	Water Inlet Size - in (mm)		3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)	3/4	(19)
	Pressure (min/max) - psi (kPa)		30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)	30-120	(207-827)
	Flow Rate Per Valve - gal/min (L/min)		9	(34)	9	(34)	9	(34)	9	(34)	9 & 12	(34 & 45)	9 & 12	(34 & 45)
	Approx. Water Usage (per cycle)- gal (L)		15.8	(59.8)	22.2	(84 )	35.1	(132.9)	38.4	(145.4)	52.6	(199.1)	80.1	(303.2)
	Drain Diameter (O.D.) - in (cm)		2 1/4	(5.7)	3	(7.6)	3	(7.6)	3	(7.6)	3	(7.6)	3	(7.6)
	Floor to Center of Drain - in (cm)		6	(15.2)	5	(12.7)	6 7/8	(17.5)	6 5/8	(16.8)	6 5/8	(16.8)	8 5/16	(21.1)
Electrical	Model	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size											
	-10	120 / 60 / 1 / Provided	---	---	---	---	---	---	---	---	---	---	---	---
	-12	208-240 / 60 / 1 / 2 wire + ground	15 / 6.2 / #12	15 / 6.2 / #12	15 / 6.2 / #12	20 / 8.4 / #12	20 / 12 / #12							
		208-240 / 60 / 3 / 3 wire + ground												
	-39	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	20 / 8.4 / 3.5 mm²	20 / 12 / 3.5 mm²	30 / 15 / 5.3 mm²						
-59	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	15 / 6.2 / 3.5 mm²	20 / 8.4 / 3.5 mm²	---	---							
Installation	Min. Clearance Between Machines - in (cm)		1/2	(1.3)	1/2	(1.3)	1/2	(1.3)	1/2	(1.3)	1/2	(1.3)	1/2	(1.3)
	Min. Clearance Behind Machines - in (cm)		24	(61)	24	(61)	24	(61)	24	(61)	24	(61)	24	(61)
	Min. Concrete Thickness - in (cm)		6	(15.2)	6	(15.2)	8	(20.3)	8	(20.3)	8	(20.3)	12	(30.5)

Due to continuous product improvements specifications are subject to change, please consult Dexter Laundry, your Dexter Authorized Distributor or the installation manual for the most accurate information. Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE and AGA.



EXPRESS DRYER SPECIFICATIONS

		T-30		T-50		T-80	
Capacity	Dry Weight Capacity - lb (kg)	30	(13.6)	50	(22.7)	80	(36.3)
	Cylinder Volume - cu ft (L)	11.3	(320)	15.8	(447.4)	23	(651.3)
Speed	Tumbler Speed - RPM	47	---	45	---	40	---
	Motor Size - 60 Hz Model - hp (kW)	0.5	(0.38)	1	(0.75)	1	(0.75)
	Motor Size - 50 Hz Model - hp (kW)	0.5	(0.38)	0.75	(0.56)	0.75	(0.56)
Airflow	60 Hz Model - cfm (M3/min)	830	(23.5)	910	(25.8)	1200	(34)
	50 Hz Model - cfm (M3/min)	690	(19.5)	760	(21.5)	1000	(28.3)
Dimensions	Cabinet Height - in (cm)	72 1/4	(183.5)	72 1/4	(183.5)	75 3/4	(192.4)
	Cabinet Width - in (cm)	31 1/2	(80)	34 1/2	(87.6)	38 1/2	(97.8)
	Cabinet Depth - in (cm)	41 3/4	(106)	48	(121.9)	51 3/4	(131.4)
	Door Opening - in (cm)	22 5/8	(57.5)	25 5/8	(65.1)	25 5/8	(65.1)
	Floor to Door Bottom - in (cm)	28 3/4	(73)	27 1/4	(69.2)	29 1/4	(74.3)
	Cylinder Diameter - in (cm)	30	(76.2)	32 1/2	(82.6)	36 1/2	(92.7)
	Cylinder Depth - in (cm)	27 1/2	(69.9)	33	(83.8)	38	(96.5)
	Lint Screen Area - sq in (sq cm)	515	(3323)	708	(4568)	823	(5310)
Weight	Net Weight - lbs (kg)	454	(205.9)	540	(244.9)	715	(324.3)
Shipping	Shipping Weight - lbs (kg)	499	(226.3)	590	(267.6)	770	(349.3)
	Shipping Height - in (cm)	77 1/4	(196.2)	77 1/4	(196.2)	80 3/4	(205.1)
	Shipping Width - in (cm)	32 3/4	(83.2)	36	(91.4)	40 1/4	(102.2)
	Shipping Depth - in (cm)	45 1/2	(115.6)	51 1/2	(130.8)	55 1/2	(141)
Gas (Gas Models Only)	Gas Supply Connection - in (mm)	1/2	(12.7)	1/2	(12.7)	3/4	(19.1)
	Natural Gas Supply (Water Column) - in (cm)	5-10	(12.7 - 25.4)	5-10	(12.7 - 25.4)	5-10	(12.7 - 25.4)
	LP Gas Supply (Water Column) - in (cm)	11 1/2 - 13 1/2	(29.2 - 34.3)	11 1/2 - 13 1/2	(29.2 - 34.3)	11 1/2- 13 1/2	(29.2 - 34.3)
	Gas Usage - 60Hz Model - BTU/hr (kW)	90,000	(26.4)	145,000	(42.5)	215,000	(63)
	Gas Usage - 50Hz Model - BTU/hr (kW)	74,000	(21.7)	120,000	(35.2)	195,000	(57.1)
Electrical	Gas Models	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability				
	-10	120 / 60 / 1 / 2 wire + ground	15 / 9.6 / #12 / Non-Reversing		15 / 9.6 / #12 / Non-Reversing		15 / 10.4 / #12 / Non-Reversing
	-39	230 / 50 / 1 / 2 wire + ground	10 / 5.1 / 2.1 mm² / Non-Reversing		10 / 5.1 / 2.1 mm² / Non-Reversing		10 / 5.2 / 2.1 mm² / Non-Reversing
	-59	230 / 50 / 1 / 2 wire + ground	10 / 5.1 / 2.1 mm² / Non-Reversing		10 / 5.1 / 2.1 mm² / Non-Reversing		10 / 5.2 / 2.1 mm² / Non-Reversing
	Electric Models	kW / Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability				
	-79	24 / 400 / 50 / 3 / 4 wire + ground	50 / 45 / 13.3 mm² / Non-Reversing		50 / 45 / 13.3 mm² / Non-Reversing		50 / 45 / 13.3 mm² / Non-Reversing
Installation	Minimum Clearance Between Machines - in (cm)	0	(0)	0	(0)	0	(0)
	Minimum Clearance Behind Machines - in (cm)	18	(45.7)	18	(45.7)	8	(45.7)
	Make-Up Air Required - sq ft (sq cm)	1	(929)	1.25	(1161)	1.5	(1394)
	Exhaust Size - in (cm)	8	(20.3)	8	(20.3)	8	(20.3)
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3	(7.6)	0.3	(7.6)	0.3	(7.6)
	Recommended Exhaust Length - ft (m) & 2 elbows	14	(4.3)	14	(4.3)	14	(4.3)

Due to continuous product improvements specifications are subject to change, please consult Dexter Laundry, your Dexter Authorized Distributor or the installation manual for the most accurate information. Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE and AGA.

EXPRESS STACK DRYER SPECIFICATIONS

		T-20x2		T-30x2		T-50x2	
Capacity	Dry Weight Capacity - lb (kg)	2 x 20	(2 x 9.1)	2 x 30	(2 x 13.6)	2 x 50	(2 x 22.7)
	Cylinder Volume (per tumbler) - cu ft (L)	7	(198.2)	11.3	(320)	15.8	(447.4)
Speed	Tumbler Speed - RPM	51	---	47	---	45	---
	Motor Size (per tumbler) - Standard - hp (kW)	0.3	(0.25)	0.5	(0.38)	0.75	(0.56)
	Motor Size (per tumbler) - Reversing - hp (kW)	---	---	---	---	2 & 0.5	(1.5 & 0.38)
Airflow	60 Hz Model (per tumbler) - cfm (M3/min)	370	(10.5)	600	(17)	650	(18.4)
	50 Hz Model (per tumbler) - cfm (M3/min)	300	(8.5)	500	(14.2)	510	(14.4)
Dimensions	Cabinet Height - in (cm)	68 1/2	(174)	76 1/4	(193.7)	79 1/4	(201.3)
	Cabinet Width - in (cm)	27	(68.6)	31 1/2	(80)	34 1/2	(87.6)
	Cabinet Depth - in (cm)	44 5/8	(113.3)	49 1/2	(125.7)	54 3/4	(139.1)
	Door Opening - in (cm)	18 1/8	(46)	22 5/8	(57.5)	25 5/8	(65.1)
	Floor to Lower Door Bottom - in (cm)	8 1/2	(21.6)	7 5/8	(19.4)	7	(17.8)
	Floor to Upper Door Bottom - in (cm)	42	(106.7)	45 1/4	(114.9)	46	(116.8)
	Cylinder Diameter - in (cm)	25 1/2	(64.8)	30	(76.2)	32 1/2	(82.6)
	Cylinder Depth - in (cm)	24	(61)	27 1/2	(69.9)	33	(83.8)
	Lint Screen Area (per tumbler) - sq in (sq cm)	285	(1839)	453	(2923)	544	(3510)
Weight	Net Weight - lbs (kg)	615	(279)	719	(326.1)	871	(395.1)
Shipping	Shipping Weight - lbs (kg)	650	(295)	765	(347)	922	(418.2)
	Shipping Height - in (cm)	74	(188)	81 1/4	(206.4)	84 1/4	(214)
	Shipping Width - in (cm)	31.5	(80)	33	(83.8)	36	(91.4)
	Shipping Depth - in (cm)	49	(124.5)	53 3/4	(136.5)	61 1/2	(156.2)
Gas (Gas Models Only)	Gas Supply Connection - in (mm)	1/2	(12.7)	1/2	(12.7)	1/2	(12.7)
	Natural Gas Supply (Water Column) - in (cm)	5-10	(12.7 - 25.4)	5-10	(12.7 - 25.4)	5-10	(12.7 - 25.4)
	LP Gas Supply (Water Column) - in (cm)	11 1/2 - 14	(29.2 - 35.6)	11 1/2 - 14	(29.2 - 35.6)	11 1/2 - 14	(29.2 - 35.6)
	Gas Usage - 60Hz Model (per tumbler) - BTU/hr (kW)	56,000	(16.4)	90,000	(26.4)	108,000	(31.7)
	Gas Usage - 50Hz Model (per tumbler) - BTU/hr (kW)	47,000	(13.8)	74,000	(21.7)	96,500	(28.3)
Electrical	Gas Models (per stack dryer)	Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability				
	-11	208-240 / 60 / 1 / 2 wire + ground	---	---	20 / 15 / #12 / Reversing		
	-15	208-240 / 60 / 1 / 2 wire + ground	15 / 3.8 / #12 / Non-Reversing	15 / 5 / #12 / Non-Reversing	20 / 10 / #12 / Non-Reversing		
		120 / 60 / 1 / 2 wire + ground	15 / 7.8 / #12 / Non-Reversing	20 / 8 / #12 / Non-Reversing	30 / 20 / #10 / Non-Reversing		
	-39	230 / 50 / 1 / 2 wire + ground	15 / 6.6 / 3.5 mm <sup>2</sup> / Non-Reversing	15 / 10 / 3.5 mm <sup>2</sup> / Non-Reversing	---		
	-49	240 / 50 / 1 / 2 wire + ground	---	---	20 / 15 / 3.5 mm <sup>2</sup> / Reversing		
					20 / 10 / 3.5 mm <sup>2</sup> / Non-Reversing		
	-59	230 / 50 / 1 / 2 wire + ground	---	15 / 10 / 3.5 mm <sup>2</sup> / Non-Reversing	20 / 10 / 3.5 mm <sup>2</sup> / Non-Reversing		
	Electric Models	kW / Volts / Hz / Phase / Wiring	Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability				
-79	24 / 400 / 50 / 3 / 4 wire + ground	---	50 / 45 / 13.3 mm <sup>2</sup> / Non-Reversing	---			
-82	15 / 400 / 50 / 3 / 4 wire + ground	30 / 30 / 8.5 mm <sup>2</sup> / Non-Reversing	---	---			
Installation	Min. Clearance Between Machines - in (cm)	0	(0)	0	(0)	0	(0)
	Min. Clearance Behind Machines - in (cm)	18	(45.7)	18	(45.7)	18	(45.7)
	Make-Up Air Required (per stack dryer) - sq in (sq cm)	1	(929)	1.5	(1394)	1.5	(1394)
	Exhaust Size - in (cm)	8	(20.3)	8	(20.3)	8	(20.3)
	Max. Exhaust Back Pressure (Water Column) - in (mm)	0.3	(7.6)	0.3	(7.6)	0.3	(7.6)
	Recommended Exhaust Length - ft (m) & 2 elbows	14	(4.3)	14	(4.3)	14	(4.3)

Due to continuous product improvements specifications are subject to change, please consult Dexter Laundry, your Dexter Authorized Distributor or the installation manual for the most accurate information. Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE and AGA.



		T-350		T-450		T-750		
Capacity	Dry Weight Capacity (per machine) - lb (kg)		20 (9.1)	30 (13.6)	50 (22.7)			
	Cylinder Volume - Washer : Dryer - cu ft (L)		2.7 : 7 (76.5 : 198.2)	4 : 11.3 (113.3 : 320)	6.5 : 15.8 (184.1 : 447.4)			
Speed & Airflow	Washer Extract Speed - High : Interm. : Wash - g (RPM)		200 : 60 : 0.9 (579 : 449 : 55)	200 : 60 : 0.9 (750 : 411 : 50)	200 : 60 : 0.9 (685 : 375 : 43)			
	Dryer Tumbler Speed - RPM		51 ---	47 ---	45 ---			
	Motor Size - Washer : Dryer - hp (kW)		1 : 0.3 (0.75 : 0.25)	2 : 0.5 (1.5 : 0.38)	3 : 2 & 0.5 (2.2 : 1.5 & 0.38)			
	Airflow - 60 Hz : 50 Hz - cfm (M3/min)		370 : 300 (10.5 : 8.5)	500 : 450 (14.6 : 12.7)	650 : 510 (18.4 : 14.4)			
Dimensions	Overall - Height : Width : Depth - in (cm)		74 ¾ : 27 : 44 ⅝ (189.9 : 68.6 : 113.7)	78 ⅜ : 31 ½ : 49 ⅞ (199 : 80 : 125.6)	87 ⅜ : 34 ½ : 54 ⅝ (221.5 : 87.6 : 138.7)			
	Shipping - Height : Width : Depth - in (cm)		80 ⅝ : 29 ¼ : 49 ¾ (204.8 : 74.3 : 126.4)	84 : 34 : 54 (213.4 : 86.4 : 137.2)	91 ⅝ : 35 ⅞ : 63 ½ (232.7 : 91.1 : 161.3)			
	Weight - Net : Shipping - lb (kg)		800 : 840 (362.9 : 381)	1051 : 1101 (476.7 : 499.4)	1600 : 1650 (725.7 : 748.4)			
	Washer Cylinder - Diameter : Depth - in (cm)		21 : 13 ½ (53.3 : 34.3)	25 : 14 ⅛ (63.5 : 35.9)	30 : 16 (76.2 : 40.6 )			
	Dryer Cylinder - Diameter : Depth - in (cm)		25 ½ : 24 (64.8 : 61)	30 : 27 ½ (76.2 : 69.9)	32 ½ : 33 (82.5 : 83.8)			
	Door Opening - Washer : Dryer- in (cm)		12 ¼ : 18 ⅛ (31.1 : 46)	15 ¼ : 22 ⅞ (38.7 : 57.6)	19 ¼ : 25 ⅝ (48.9 : 65.1)			
	Floor to Door Bottom - Washer : Dryer - in (cm)		14 ⅞ : 48 ¼ (37.8 : 122.6)	12 ⅞ : 47 ⅜ (31.6 : 120.3)	16 : 55 ⅛ (40.6 : 140)			
Dryer Lint Screen Area - sq in (sq cm)		285 (1839)	453 (2923)	544 (3510)				
Installation	Min. Clearance - Between : Behind - in (cm)		½ : 24 (1.3 : 61)	½ : 24 (1.3 : 61)	½ : 24 (1.3 : 61)			
	Min. Concrete Thickness - in (cm)		6 (15.2)	6 (15.2)	8 (20.3)			
	Make-Up Air Required - sq ft (sq cm)		0.7 (650)	1 (929)	1 (929)			
	Exhaust Size - in (cm)		6 (15.2)	6 (15.2)	8 (20.3)			
	Max. Exhaust Back Pressure (Water Column) - in (mm)		0.3 (7.6)	0.3 (7.6)	0.3 (7.6)			
	Recommended Exhaust Length - ft (m) & 2 elbows		14 (4.3)	14 (4.3)	14 (4.3)			
Water	Water Inlet Size - in (mm)		¾ (19)	¾ (19)	¾ (19)			
	Pressure (min-max) - psi (kPa)		30-120 (207-827)	30-120 (207-827)	30-120 (207-827)			
	Flow Rate Per Valve - gal/min (L/min)		9 (34)	9 (34)	9 (34)			
	Approx. Water Usage - gal (L)		15.8 (59.8)	23.5 (89)	38.4 (145.4)			
	Drain Diameter (O.D.) - in (cm)		2 ¼ (5.7)	3 (7.6)	3 (7.6)			
	Floor to Center of Drain - in (cm)		5 ⅞ (14.9)	4 ⅞ (11.3)	6 ⅝ (16.8)			
Gas	Gas Supply Connection - in (mm)		½ (12.7)	½ (12.7)	½ (12.7)			
	Natural Gas Supply (Water Column) - in (cm)		5-10 (12.7-25.4)	5-10 (12.7-25.4)	5-10 (12.7-25.4)			
	LP Gas Supply (Water Column) - in (cm)		11 ½ -14 (29.2-35.6)	11 ½ -14 (29.2-35.6)	11 ½ -14 (29.2-35.5)			
	Gas Usage - 60 Hz : 50 Hz - BTU/hr (kW)		56,000 : 47,000 (16.4 : 13.8)	80,000 : 74,000 (23.4 : 21.7)	108,000 : 96,000 (31.7 : 28.3)			
Electrical	Model		Volts / Hz / Phase / Wiring				Circuit Breaker Amps / Running Amps / Wire Size / Reversing Availability	
	-16	Washer	208-240 / 60 / 1 / 2 wire + ground	---	---	20 / 8.4 / #12		
			208-240 / 60 / 3 / 3 wire + ground					
		Gas Dryer	208-240 / 60 / 1 / 2 wire + ground	---	15 / 10 / #12 / Reversing			
	-17	Washer	208-240 / 60 / 1 / 2 wire + ground	15 / 6.2 / #12	15 / 6.5 / #12	---		
			208-240 / 60 / 3 / 3 wire + ground					
		Gas Dryer	120 / 60 / 1 / 2 wire + ground	15 / 3.9 / #12 / Non-Reversing	15 / 4 / #12 / Non-Reversing	---		
			208-240 / 60 / 1 / 2 wire + ground	15 / 1.9 / #12 / Non-Reversing	15 / 2.5 / #12 / Non-Reversing	---		
	-39	Washer	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm²	15 / 6.5 / 3.5 mm²	20 / 8.4 / 3.5 mm²		
		Gas Dryer	230 / 50 / 1 / 2 wire + ground	15 / 3.4 / 3.5 mm² / Non-Reversing	15 / 5 / 3.5 mm² / Non-Reversing	15 / 10 / 3.5 mm² / Reversing		
	-59	Washer	230 / 50 / 1 / 2 wire + ground	---	15 / 6.5 / 3.5 mm²	---		
		Gas Dryer	230 / 50 / 1 / 2 wire + ground	---	15 / 5 / 3.5 mm² / Non-Reversing	---		
	-79	Washer	230 / 50 / 1 / 2 wire + ground	---	15 / 6.5 / 3.5 mm²	---		
		24 kW Electric Dryer	400 / 50 / 3 / 4 wire + ground	---	50 / 45 / 13.3 mm² / Non-Reversing	---		
	-82	Washer	230 / 50 / 1 / 2 wire + ground	15 / 6.2 / 3.5 mm²	---	---		
15 kW Electric Dryer		400 / 50 / 3 / 4 wire + ground	30 / 30 / 8.5 mm² / Non-Reversing	---	---			

Due to continuous product improvements specifications are subject to change, please consult Dexter Laundry, your Dexter Authorized Distributor or the installation manual for the most accurate information. Agency approvals vary based on machine configuration. Major approval bodies include ETL, CE and AGA.

DEXTER AUTHORIZED DISTRIBUTORS



Your Dexter Authorized Distributor is your key to a successful laundry experience. From selecting the right location, to helping you organize a grand opening, your Dexter Authorized Distributor is the local laundry expert in your area.



DISTRIBUTOR SERVICES

- Although services vary by location, common services include:
- Location Selection
  - Demographic Analysis
  - Ordinances & Zoning
  - Laundry Design
  - Financing Applications
  - Installation
  - Parts
  - Service

FIND YOUR DISTRIBUTOR

When you're ready to get started you can find your Dexter Authorized Distributor using the [DISTRIBUTOR LOCATOR](#) feature available on [DEXTER.COM](#). Your Distributor will be happy to help you start your laundry project today.



WHAT MAKES A DEXTER AUTHORIZED DISTRIBUTOR

Like the Dexter Laundry team, all Dexter Authorized Distributors share two common values - a passion for the laundry industry and a desire to create loyal customers for life. They believe that their role is more than just getting a piece of laundry equipment to a location. Their knowledge helps to guarantee you've found the right location and that the right products are selected, installed, and supported to help you succeed.

Many of our Dexter Authorized Distributors are active in industry associations, participate in charitable causes, and work hard to build a positive image of the laundry industry within their territory. Thanks to their support, Dexter products can be found around the globe in laundromats, hospitals, hotels, baseball stadiums, fitness clubs, animal clinics, and variety of other industry segments.





**DEXTER.**  
**LAUNDRY**

**DEXTER.COM** EMPLOYEE OWNED | MADE IN THE USA | SINCE 1894 **1.800.524.2954**

